


PIX-Terminator®-HXS



- Standardi: BS 3790, ISO 5290 & RMA IP-22
- Primjene: mašine za obradu, drobilice drva, drobilice kamena, bageri itd.
- Odjeljci: TR-HA, TR-HB, TR-HC, TR-HSPA, TR-HSPB, TR-HSPC, TR-H5V, TR-H8V

Product Range							
Section	Thickness (mm)	Top Width (mm)	Angle (Degree)	Pitch (mm)	Manufacturing Range		Length Designation
					Min. (inch / mm)	Max. (inch / mm)	
TR-HA	13.0	10.5	40	15.9	33 / 838	255 / 6477	Li
TR-HB	17.0	14.5	40	19.0	43 / 1092	900 / 22860	Li
TR-HC	22.0	17.0	40	25.5	47 / 1194	923 / 23444	Li
TR-HSPA	13.0	12.0	40	15.0	38 / 959	175 / 4439	Lp
TR-HSPB	17.0	17.0	40	19.0	69.5 / 1762	2391 / 9331	Lp
TR-HSPC	22.0	22.5	40	25.5	64 / 1632	926 / 23527	Lp
TR-H5V	15.8	16.5	40	17.5	50 / 1270	923 / 23444	La
TR-H8V	25.4	25.0	40	28.6	100 / 2540	926 / 23520	La

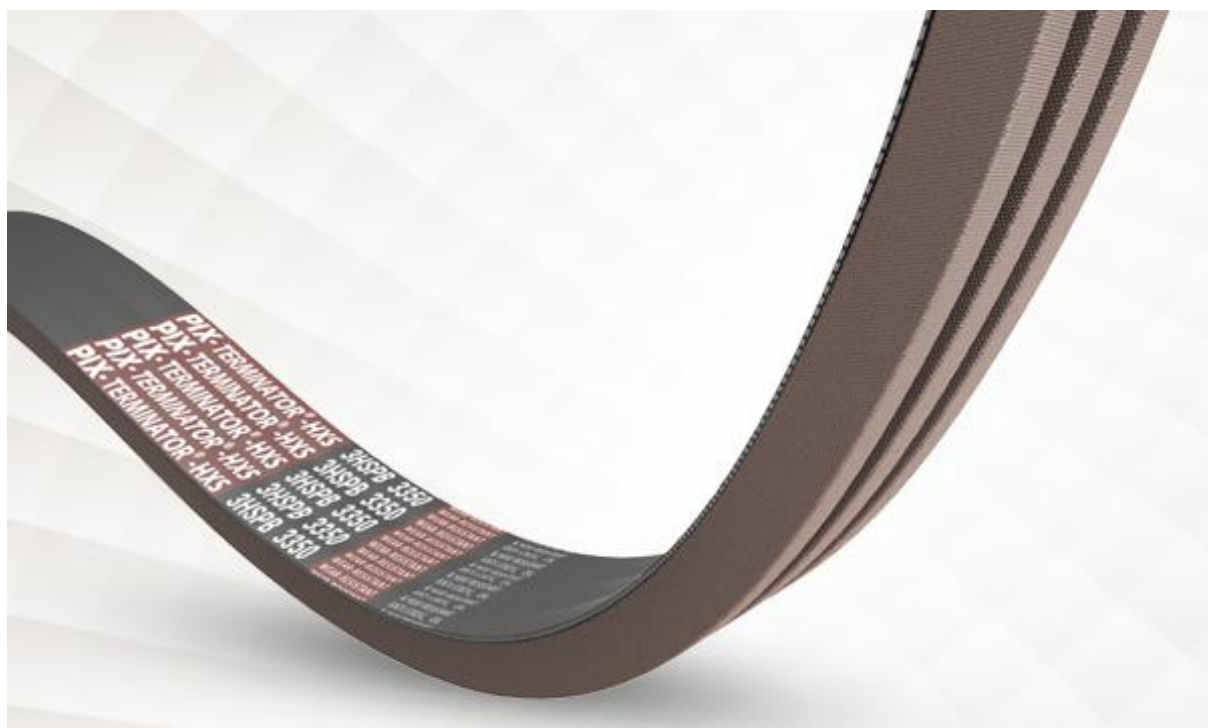

KONTAKTIRAJTE NAS

+387 35 744 174

POŠALJITE E-MAIL

tbstrade@bih.net.ba

PRATITE NAS

<https://tbstrade.ba>

PIX-Terminator®-XS



- Standardi: BS 3790, ISO 4184, RMA IP-22
- Primjene: mašine za obradu, drobilice drva, drobilice kamena, bageri itd.
- Odjelci: TR-A, TR-B, TR-C, TR-SPA, TR-SPB, TR-SPC, TR-3V, TR-5V, TR-8V

Product Range							
Section	Thickness (mm)	Top Width (mm)	Angle (Degree)	Pitch (mm)	Manufacturing Range		Length Designation
					Min. (inch / mm)	Max. (inch / mm)	
TR-A	13.0	8.0	40	90	16 / 406	357 / 9068	Li
TR-B	17.0	11.0	40	112	16 / 406	926 / 23520	Li
TR-C	22.0	14.0	40	180	31 / 787	927 / 23546	Li
TR-SPA	13.0	10.0	40	90	22.5 / 576	359 / 9113	Lp
TR-SPB	17.0	14.0	40	140	39.5 / 1000	928.5 / 23580	Lp
TR-SPC	22.0	18.0	40	224	73 / 1861	931 / 23654	Lp
TR-3V	9.7	8.0	40	63	19.5 / 495	160 / 4064	La
TR-5V	15.8	14.0	40	140	48 / 1219	929 / 23597	La
TR-8V	25.4	23.0	40	335	101 / 2565	934 / 23724	La



KONTAKTIRAJTE NAS
+387 35 744 174

POŠALJITE E-MAIL
tbstrade@bih.net.ba

PRATITE NAS
<https://tbstrade.ba>